

PROFESSIONAL DMR MOBILE RADIO

HM78X

EMPOWER YOUR OPERATION



EMPOWER YOUR OPERATION

Leading the PMR industry, Hytera possesses comprehensive capabilities of software and hardware development and continually evolves for more than 20 years to provide solutions to tens of thousands of PMR users worldwide.

Hytera now presents the next generation of professional digital mobile radio, the flexible and scalable HM78X. The HM78X supports a standard single control head and remote control head (Single or dual) to suit different environments such as vehicles, motorcycles and fixed control rooms, ensuring efficient communication. Moreover, it provides various connections, through which rich applications can be integrated into existing services to improve work efficiency.

The HM78X adopts a new appearance while maintaining high quality. The new UI interaction facilitates faster operation. The AI-based noise cancellation technology guarantees clearer voice in noisy environments.



ENHANCED DESIGN



2.4-inch screen, simple UI interaction assists in operating quickly

Standard 1DIN size


Faster cooling with all-aluminum case design



Built-in speaker assures clear and loud voice even without an external speaker

Built-in BT 5.0, allows wireless accessory (such as wireless remote speaker microphone) Adaptation and data transmission.

RF Antenna Port BNC-F Power Inlet DC 13.6V Accessory Connector DB26 Ethernet Port RJ45

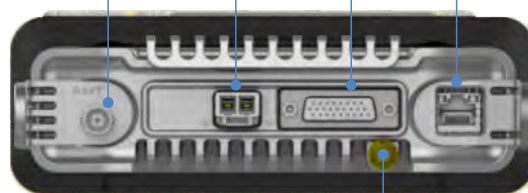

GPS Antenna



PRODUCT HIGHLIGHTS

MORE FLEXIBLE INSTALLATION

With the flexible control heads and accessories, the HM78X can be installed in various environments to satisfy different use requirements. The connection cable of the remote control head can be either 3m, 10m or 40m as standard. A connection cable of up to 120m is also available(Customisation required).

Form	 <p>Standard control head</p>	 <p>Remote single/dual control head *</p>	 <p>Fixed station</p>
Application	Small vehicles, motorcycles	Ambulance, fire engine, truck, large bus, dispatching room	desktop office

* Coming soon

AI-BASED NOISE CANCELLATION FOR CLEARER AUDIO

The HM78X adopts AI noise cancellation technology to filter out background noise (such as road noise), eliminate echoes, extract human voices from noise, and reduce howling and exhalation sounds at close proximity. With this technology, the mobile radio provides crisper and clearer audio for the other party.

The advantages of AI noise cancellation are as follows.

- **Clearer**
Extremely high noise cancellation on steady and unsteady noise, up to 30dB
Can reduce howling outside 30cm
- **Faster**
Accurately extract human voices from noise in milliseconds or even without delay
- **Flexible**
With deep learning ability, suitable for more noise
10-level adjustable noise reduce level

MAIN FEATURES

Operating Modes

- Conventional(digital/analog)
- Digital trunking

Security

- Emergency alarm
- Lone worker
- Authentication
- Over the air encryption
- E2EE
 - Basic encryption
 - Full encryption
 - Hardware encryption

Text Message

- Private message
- Group message
- Quick text
- Status Message

GPIO Pins

- Public Address
- Horn & Lights
- Voice notify
- Ignition sense

Solution

- IP Transit
- Back to back
- Wireless link
- Clarity Transmission

Supplementary

- Alert call(conventional)
- Remote monitor
- Enable/Disable
- Radio check

Voice Service

- Private call
- Group call
- All call

Analog Mode

- 2-Tone signaling
- 5-Tone Signalling*
- HDC1200

*coming soon

RICH SCALABLE APPLICATION


HM78X supports multiple connections through BT, and the accessory and network (Ethernet) ports. It also supports Clarity Transmission and back to back connections which will greatly facilitate your solutions. Examples include:

- Allow for collection of data from equipment (Wired or BT) and facilitate transmission of this data to the background platforms using either the IP or radio network.
- The coverage in conventional digital mode can be extended by IP Transit.
- Cross-band or cross-system communication can be achieved through Back-to-Back or IP Transit.
- For situations where repeaters cannot be connected via IP or the cost of doing so is too high, the repeaters can be connected via cable to HM78X to create a wireless link between regions. This could be useful in industries such as oil extraction where offshore oil rigs are used.

Application Solution

Clarity Transmission

The data Clarity Transmission feature provides a transparent channel for data transmission without any change. As a part of the data acquisition and monitoring control system, the HM78X provides customers with solutions for monitoring and controlling industrial production processes.

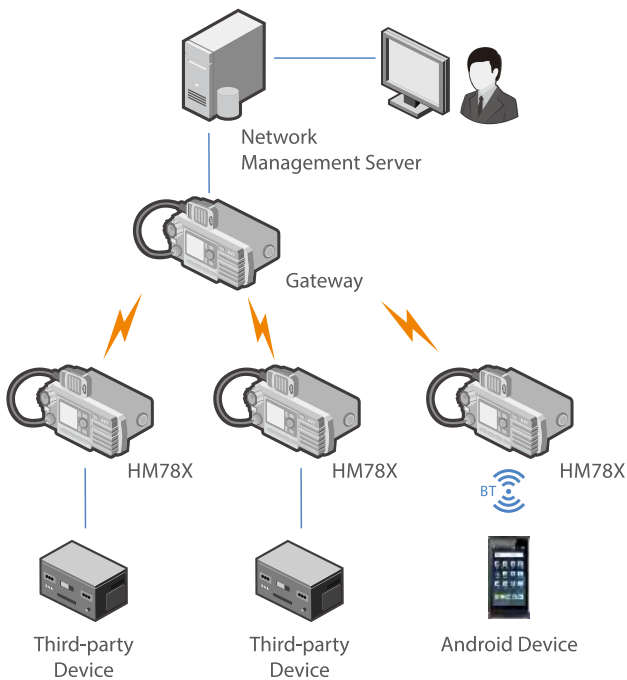

IP Transit Solution (Digital Mode)


With the Ethernet interface of HM78X, IP Transit offers an economical and simple networking solution that complements the existing two-way radio system.

It can connect two or more conventional communication systems in different areas through IP network to solve the communication problems across regions, complex terrains, or in buildings where signals are difficult to penetrate .

It can connect mobile radios working with different frequency bands to solve the across-band communication problems, this greatly saves on cost due to only requiring one frequency and it moves the need for additional infrastructure and complex configuration.

The IP Transit solution supports the following services:

- All voice calls (including calls with acknowledgement)
- All data services
- All signaling

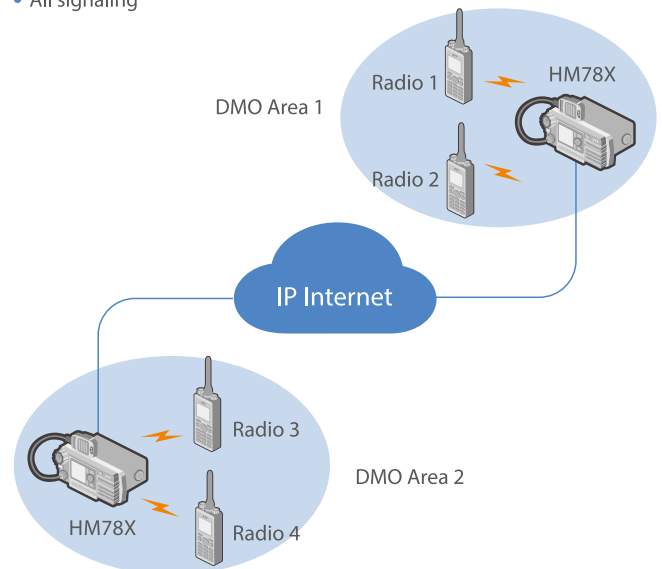

Motorcycles Application*

*coming soon



*Picture as an example

Police Car Application



Fire Engine Application

Conventional(digital/analog)
Digital trunking
Remote single/dual control head *

*Coming Soon



SPECIFICATIONS

General			
Frequency Range	UHF: 350-470MHz, VHF: 136-174MHz		
Channel Capacity	1024		
Zone Capacity	64(each with a maximum of 256 channels)		
Channel Spacing	12.5kHz/20kHz/25kHz		
Operating Voltage	13.6 V ±15%		
Current Drain	Standby	< 0.5A	
	Receive	< 2.0A	
	Transmit	1W	<3A
		5W	<4A
25W		<8A	
	45W/50W	<12A	
Frequency Stability	±0.5 ppm		
Antenna Impedance	50Ω		
Dimensions (H x W x D)	61.5 x 177 x 179 mm		
Weight	1520g		
LCD Display	2.4 inch		

Receiver		
Sensitivity	Analog	0.18μV(12dB SINAD) 0.16μV(Typical)(12dB SINAD)
	Digital	0.18μV/BER5%
Selectivity	TIA-603	60dB@12.5kHz / 70dB@20/25kHz
	ETSI	60dB@12.5kHz / 70dB@20/25kHz
Intermodulation	TIA-603	70dB@12.5/20/25kHz
	ETSI	70dB@12.5/20/25kHz
Spurious Response Rejection	TIA-603	70dB@12.5/20/25kHz
	ETSI	70dB@12.5/20/25kHz
Blocking	TIA-603	80dB
	ETSI	84dB
Hum and Noise	40dB@12.5kHz, 43dB@20kHz, 45dB@25kHz	
Rated Audio Power Output	Internal (20 Ohm load)	3W
	External (8 Ohm load)	7.5W
Max Audio Power Output	Internal (20 Ohm load)	8W
	External (8 Ohm load)	20W
Rated Audio Distortion	≤3%	
Audio Response	+1 ~ -3dB	
Conducted Spurious Emission	<-57dBm	

Transmitter	
RF Power Output	Low power : UHF:1-25W, VHF:1.5-25W High power: UHF:1-45W, VHF:1.5-50W
FM Modulation	11K0F3E@12.5kHz; 14K0F3E@20kHz; 16K0F3E@25kHz
4FSK Digital Modulation	12.5kHz Data Only: 7K60FXD 12.5kHz Data and Voice: 7K60FXW
Conducted/Radiated Emission	-36dBm<1GHz; -30dBm>1GHz
Modulation Limiting	±2.5kHz @ 12.5kHz; ±4.0kHz @ 20kHz; ±5.0kHz @ 25kHz
FM Hum & Noise	40dB @ 12.5kHz; 43dB @ 20kHz 45dB @ 25kHz
Adjacent Channel Power	60dB @ 12.5kHz; 70dB @ 20/25kHz
Audio Response	+1 ~ -3dB
Audio Distortion	≤3%
Digital Vocoder Type	AMBE+2™
Digital Protocol	ETSI-TS102 361-1,-2,-3

Environmental	
Operating Temperature	-30°C~+60°C
Storage Temperature	-40°C~+85°C
ESD	IEC 61000-4-2 (Level 4) ±8kV (Contact) ±15kV (Air)
American Military Standard	MIL-STD-810 G
Dustproof & Waterproof	IP54
Humidity	Per MIL-STD-810G Standard
Shock & Vibration	Per MIL-STD-810G Standard

Location Service	
GNSS	*GPS, GPS+GLONASS, GPS+BDS
TTF (Time To First Fix) Cold Start	<1minute
TTF (Time To First Fix) Hot Start	<10seconds
Horizontal Accuracy	<5meters

*Accuracy specs are for long-term tracking (95th percentile values>5 satellites visible at a nominal -130dBm signal strength)

ACCESSORIES

Standard




Conventional model:
palm microphone
without keypad



Trunking model:
palm microphone
with keypad



Mounting bracket



Power cord



Fuse



Model with GPS:
GPS antenna

Optional



DB26 connector
external speaker



10-pin connector
desktop microphone



Power supply for
mobile radio



Programming cable



DB26 Connector foot PTT



Ignition cable



Antenna



DB26M-DB9M cable connects
mobile radio and repeater for
wireless link solution



DB26-DB26 cable connects
two repeater to realize
cross-band(VHF_UHF) or
cross mode(analog_digital)
communication



Power supply of fixed
station cabinet



BT Wireless remote
speaker microphone



BT Wireless ring PTT



Hytera Communications Corporation Limited

Stock Code: 002583.SZ

Address: Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, P.R.C.

Tel: +86-755-2697 2999 **Fax:** +86-755-8613 7139 **Post:** 518057

Http://www.hytera.com **marketing@hytera.com**



Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT. Hytera are registered trademarks of Hytera Communications Corp., Ltd.
©2022 Hytera Communications Corp., Ltd. All Rights Reserved.